

# HİRA TESTING EQUIPMENT



## AUTOMATIC CONCRETE COMPRESSION TESTING MACHINES, WELDED WALL

STANDARDS: EN 12390-3, 12390-4; BS 1881, ASTM C39

The HİRA Automatic range of 1500 kN, 2000 kN and 3000 kN Capacity Compression Testing Machines have been designed for reliable and consistent testing of a wide range of specimens. Machines confirm all EN, ASTM and BS standards written above. These also meet the requirements of CE norms for the safety and health of the operator.

Testing machines are supplied with EN compression platens as standard. Machines also comply with the ASTM C39 standard when used together with suitable platens.

Tests can be performed by either Digital Readout Unit or on a computer with using free Software.

The Automatic Compression Testing Machines allow inexperienced operators to perform the tests. Once the machine has been switched on and the specimen is positioned and centered by the help of centering apparatus. The only required operations are;

- Setting test parameters, including pace rate (only required when the specimen type is changed).
- Pressing the START button on the control unit.
- The machine automatically starts the rapid approach, when the specimen touches the upper platen the rapid approach is ended and starts loading at the pace rate that selected by user and stops once the specimen fails.
- Automatically saves the test parameters and test results.



**HR-C2000**



**HR-C3000 & HR-G0979**

### **The Automatic Concrete Compression Testing Machines consist of;**

- Load Frame,
- Automatic Hydraulic Power Pack,
- Digital data acquisition & control system,
- Distance Pieces, 30 mm, 50 mm and 80 mm,
- Upper Platen (with ball seating assembly),
- Lower Platen,
- Loading Cylinder Assembly & Limit Switch for safety,
- Front and Rear Protective Doors for safety.
- Software and Ethernet Cable.

### **Concrete Compression Load Frame**

Capacities of 1500 kN, 2000 kN and 3000 kN Load Frames are most popular and available models for welded type frames.

The load frame provides the stability needed for accurate and repeatable test results over the years of operation.

The frames are supplied with factory calibration certificate for force transfer stability and the self-alignment of the upper loading platen conforming to EN 12390-4.

### **Upper Platens / Lower Platens**

The platens enable the testing of a wide variety of cylinder, cube blocks or similar samples.

- Manufactured from high quality steel, which is then hardened, smoothed and finished.
- The roughness value for the surface texture of the auxiliary platens is  $\leq 3.2 \mu\text{m}$ .
- $\varnothing 165 \text{ mm}$  and  $\varnothing 300 \text{ mm}$  Upper Platen (with ball seating assembly) and Lower Platen have centering rings on the lower platens for proper centering of 100 mm and 150 mm cube, 100 mm and 150 mm cylinder samples.



**HR-C1270**

## Block Platens with Sliding Rail Assembly

STANDARDS: EN 772-1, 12390-4

**Product Code: HR-C1250**

Block Platens with Sliding Rail Assembly are installed on the compression testing machines for testing concrete blocks and other structural materials. The Sliding Rail Assembly allows the platens to be easily installed without removing the existing Ø 300 mm compression platens. This assembly should be factory installed.

It should be noted that after installing, the vertical clearance between the platens decreases by 50 mm.

Block Platens Lifting Assembly is used for easy removal of the lower platen of Block Platens and easy replacement of the distance pieces between the piston and the lower platen.



**HR-C1250**

### Technical Specifications:

Product Code	HR-C1255	HR-C1260	HR-C1265	HR-C1270	HR-C1275
Product Name	Upper Loading Platen (with ball seating assembly) and Lower Loading Platen				
Standard	ASTM C39	ASTM C39	EN 12390-4 & ASTM C39	EN 12390-4	EN 772-1
Dimensions (mm)	Ø 105	Ø 165	Ø 216	Ø 300	310x510x50
Samples	Ø 2", 3", 4" cylinders	Ø 4", 6" cylinders, 100 mm cubes	Ø 6" cylinders 100, 150 mm cubes	Ø 100, 150, 160 mm cylinders 100, 150, 200 mm cubes	Blocks up to 310x510 mm
Hardness (not less than)	≥ 55 HRC	≥ 55 HRC	≥ 55 HRC	≥ 55 HRC	≥ 55 HRC

## Distance Pieces

Distance pieces are used to reduce the amount of vertical clearance between the upper platen and the lower platen.

**HR-C8201**  
**HR-C8202**  
**HR-C8203**



### Technical Specifications:

Product Name	Distance Piece					
Product Code	HR-C1500	HR-C1550	HR-C2000	HR-C2100	HR-C3000	HR-C3100
Distance Piece Dia. (mm)	Ø 200	Ø 165	Ø 200	Ø 165	Ø 200	Ø 165



## Loading Cylinder Assembly & Limit Switch

All frames have a single acting up stroking ram. The diameter of piston changes with regard to the capacity.

The maximum ram stroke is 50 mm, a limit switch is fitted to prevent over travel of the ram which cuts the power to the pump for safety.

At the end of the test process to start a new test the piston returns to default position.

The pressure transducer is used for load measurements.

There is a low friction coaxial PTFE seal between the cylinder and the piston fitted to the cylinder.

## HYDRAULIC POWER PACK AND DIGITAL DATA ACQUISITION & CONTROL SYSTEM

### Hydraulic Power Pack

Automatic Hydraulic Power Pack, dual stage, controlled by digital readout unit is designed to supply the required oil to the load frames for loading.

Controller unit has a simple and compact configuration. The Hydraulic Power Pack, Control and Read out Units are positioned on the right hand side of the load frame for easier accessibility, increased productivity and for safer operations.

Very silent power pack can load the specimen between 1 kN/sec. to 20 kN/sec, with an accuracy of  $\pm 5\%$ . A Rapid approach pump is supplied as standard. Safety valve (maximum pressure valve) is used to avoid machine overloading.

Maximum working pressure of the system is 400 bar.



**HR-C8000**



### Dual Stage Pump

The dual stage pump is formed by two groups;

1. Low pressure gear pump
2. High pressure radial piston pump

On the dual stage pump, a high delivery, low pressure gear pump is used for rapid approach, while a low delivery, high pressure radial piston pump is used for test execution. The rapid approach facility shortens the time interval from piston start until the upper platen touches to the specimen. This excellent feature helps to save a lot of time when a large number of specimens are going to be tested.

### Motor

The motor which drives the dual pumps is an AC motor and it is controlled by motor inverter. The variation in the oil flow is executed with the variation of the rotation speed of the motor.



### Distribution Block

A distribution block is used to control the oil flow direction supplied by the dual stage pump, the following parts are fitted to the distribution block; Solenoid valve, Safety valve (max. pressure valve), Transducer, Low pressure gear pump and High pressure radial piston pump.

## High Precision Pressure Transducer

The HİRA range of Automatic Machines can be upgraded with option High Precision Pressure Transducer special calibration Class 1 starting from 1% of the full range.

This unique performance enables the machines to be used for a considerable number of applications including:

- Early age (2 or 3 days) compression strength tests
- Flexural and splitting tests by using proper accessories
- Mortar (Cement) compression tests by using proper accessories
- Core Testing



**HR-C8003**



## Oil Tank

The tank includes enough oil to fill the mechanism which pushes the ram during the test. The level and oil temperature can be seen on the indicator fitted to the tank. It has 25 L capacity. Hydraulic motor oil, number 46, must be used.

## Digital Data Acquisition & Control System

The unit is designed to control the machine and processing of data from load-cells and pressure transducers which are fitted to the machine.

All the operations of the unit are controlled from the front panel consisting of a LCD display and function keys.

The unit has easy to use menu options.

Digital graphic display unit loading rate of the time of Testing and load values can be monitored.

Digital graphic display is able to draw real-time "Load vs. Time".



**HR-C8002**


## Software

Sample, company, laboratory and test values can be entered in the programme.

Load-time graphic, test reports and sample reports can be taken.

Software provides test data, results, and the load-time graphs can be seen at LCD screen.

The Automatic Compression Machine can be controlled (Start, Stop commands) by a computer with the software free of charge. This software provides data acquisition and management for compression, tensile and splitting tensile test throughout the test execution. The advanced functions for data base management provide an easy navigation of all saved data. The test results certificate includes all descriptive information. Therefore, test parameters can be set and details about the test carried out such as client details, test type, specimen type, user info and other information required can be entered and printed out as well as test report and graph.

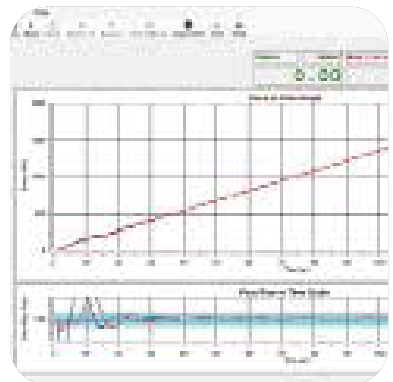

## HİRA TESTING EQUIPMENT


Software can be performed in Turkish and English.

Test results, graphics and properties of 24 different specimens can be saved in one folder. Old test folders can be reviewed.

User can highlight all 12 different specimen curves in different colors on the graphics.

Frequently used information like name and location of the laboratory, type and dimensions of mostly used specimens are held in memory and can be written automatically by right clicking on information boxes and selecting frequently used text in menu.

User can access any data of previously completed tests and use in his/ her new report since most of the tests have same structure and properties.

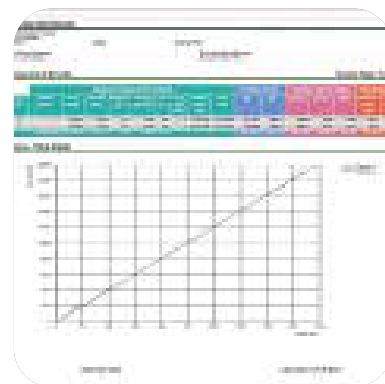

### Main Features

- Pace rate control from 1 kN/sec to 20 kN/sec depending on piston size.
- Can control 2 frames (optional)
- Can make test with load control.
- Real time display of test graph.
- Analog channels for different frame load cells
- RS-232 serial port connecting for computer interface
- LCD display
- 2 different unit system selection; kN and kgf
- Multi-language support (English and Turkish)
- 2 different unit system selection; SI and Metric
- Real-time clock and date
- Free of charge PC software for the test control and printout the test report.

### Technical Specifications:

Product Name	Automatic Compression Testing Machines, Welded Wall					
Product Code	HR-C1500	HR-C1550	HR-C2000	HR-C2100	HR-C3000	HR-C3100
Standard	EN	ASTM	EN	ASTM	EN	ASTM
Capacity (kN)	1500	1500	2000	2000	3000	3000
Roughness (µm)	≤ 3.2	≤ 3.2	≤ 3.2	≤ 3.2	≤ 3.2	≤ 3.2
Ø Lower Platen (mm)	300	165	300	165	300	165
Ø Upper Platen (mm)	300	165	300	165	300	165
Max. Vertical clearance (mm)	340	365	340	365	340	365
Piston diameter (mm)	230	230	250	250	320	320
Piston Stroke(mm)	50	50	50	50	50	50
Horizontal clearance (mm)	320	320	350	350	440	440
Thickness of platens (mm)	50	50	50	50	50	50
Hardness of Platens (HRC)	55-60	55-60	55-60	55-60	55-60	55-60
Oil Capacity (lt)	25	25	25	25	25	25
Max. Working Pressure (bar)	400	400	400	400	400	400
Power (W)	750	750	750	750	750	750

### Safety Features

- Maximum pressure valves to avoid machine overloading
- Piston travel limit switch
- Emergency stop button
- Software controlled maximum load value
- Front and rear transparent durable Plexiglas guards



## Technical Specifications:

Product Code	Product Name	Dimensions (cm)	Weight (kg)	Power Supply
HR-C1500	1500 kN Automatic Compression Testing Machine, Welded Wall, EN	79x38x93	650	220 V, 50-60 Hz, 1 ph
HR-C1550	1500 kN Automatic Compression Testing Machine, Welded Wall, ASTM	79x38x93	600	220 V, 50-60 Hz, 1 ph
HR-C2000	2000 kN Automatic Compression Testing Machine, Welded Wall, EN	81x38x101	850	220 V, 50-60 Hz, 1 ph
HR-C2100	2000 kN Automatic Compression Testing Machine, Welded Wall, ASTM	81x38x101	800	220 V, 50-60 Hz, 1 ph
HR-C3000	3000 kN Automatic Compression Testing Machine, Welded Wall, EN	95x48x105	1150	220 V, 50-60 Hz, 1 ph
HR-C3100	3000 kN Automatic Compression Testing Machine, Welded Wall, ASTM	95x48x105	1100	220 V, 50-60 Hz, 1 ph

## Spare Parts & Accessories:

Product Code	Product Name	Dimensions (cm)	Weight (kg)	Power Supply
HR-C1500/1	1500 kN Load Frame, Welded Wall, EN	43x35x93	550	---
HR-C1550/1	1500 kN Load Frame, Welded Wall, ASTM	43x35x93	500	---
HR-C2000/1	2000 kN Load Frame, Welded Wall, EN	45x35x101	750	---
HR-C2100/1	2000 kN Load Frame, Welded Wall, ASTM	45x35x101	700	---
HR-C3000/1	3000 kN Load Frame, Welded Wall, EN	59x48x105	1050	---
HR-C3100/1	3000 kN Load Frame, Welded Wall, ASTM	59x48x105	1000	---
HR-C8000	Hydraulic Power Pack and Digital Data Acquisition & Control System	36x38x91	100	220 V, 50-60 Hz, 1 ph
HR-C8001	Hydraulic Power Pack	36x38x91	98	220 V, 50-60 Hz, 1 ph
HR-C8002	Digital Data Acquisition & Control System	---	---	220 V, 50-60 Hz, 1 ph
HR-C8003	High Precision Pressure Transducer	---	---	---
HR-C8004	Software	---	---	---
HR-C8200	Distance Pieces	Ø 20 x 2,5	---	---
HR-C8201	Distance Pieces	Ø 20 x 3	---	---
HR-C8202	Distance Pieces	Ø 20 x 5	---	---
HR-C8203	Distance Pieces	Ø 20 x 8	---	---
HR-C8165	Distance Pieces	Ø 16,5 x 2,5	---	---
HR-C8166	Distance Pieces	Ø 16,5 x 3	---	---
HR-C8167	Distance Pieces	Ø 16,5 x 5	---	---
HR-C8168	Distance Pieces	Ø 16,5 x 8	---	---
HR-C1250	Block Platens with Sliding Rail Assembly	51x31x50	175	---
HR-C1280	Ball Seating Assembly	---	---	---
HR-G0975	Computer & Printer	---	---	220 V, 50-60 Hz, 1 ph
HR-G0975/1	Usb to com port Converter	---	---	---
HR-G0979	Thermal Printer	---	---	---
HR-G0979/1	Thermal Printer roll for printer (pack of 10 rolls)	---	---	---

## HİRA TESTING EQUIPMENT



### AUTOMATIC CONCRETE COMPRESSION TESTING MACHINES, WELDED WALL, WITH H-TOUCH PRO MAX CONTROL UNIT (TOUCH SCREEN)

STANDARDS: EN 12390-3, 12390-4; BS 1881, ASTM C39

The HİRA Automatic range of 1500 kN, 2000 kN and 3000 kN Capacity Compression Testing Machines have been designed for reliable and consistent testing of a wide range of specimens. Machines confirm all EN, ASTM and BS standards written above. These also meet the requirements of CE norms for the safety and health of the operator.

Testing machines are supplied with EN compression platens as standard. Machines also comply with the ASTM C39 standard when used together with suitable platens.

Tests can be performed by controlling the machine either H-Touch Pro Max Control Unit or on a computer with using free HİRATEST Software which is provided free of charge with the machines. There are several advantages of performing tests on computer with using HİRATEST Software, such as reporting and graphical output.

The Automatic Compression Testing Machines allow inexperienced operators to perform the tests. Once the machine has been switched on and the specimen is positioned and centered by the help of centering apparatus. The only required operations are;

- Setting test parameters, including pace rate (only required when the specimen type is changed).
- Pressing the START button on the control unit.
- The machine automatically starts the rapid approach, when the specimen touches the upper platen the rapid approach is ended and starts loading at the pace rate that selected by user and stops once the specimen fails.
- Automatically saves the test parameters and test results.



**HR-C2000/TS**



**HR-C3000/TS & HR-G0979**

#### ***The Automatic Concrete Compression Testing Machines consist of;***

- Load Frame,
- Automatic Hydraulic Power Pack,
- H-Touch Pro Max Control Unit,
- Distance Pieces, 30 mm, 50 mm and 80 mm,
- Upper Platen (with ball seating assembly),
- Lower Platen,
- Loading Cylinder Assembly & Limit Switch for safety,
- Front and Rear Protective Doors for safety.
- H-GUI Software and Ethernet Cable.

#### ***Concrete Compression Load Frame***

Capacities of 1500 kN, 2000 kN and 3000 kN Load Frames are most popular and available models for welded type frames.

The load frame provides the stability needed for accurate and repeatable test results over the years of operation.

The frames are supplied with factory calibration certificate for force transfer stability and the self-alignment of the upper loading platen conforming to EN 12390-4.

## Upper Platens / Lower Platens

The platens enable the testing of a wide variety of cylinder, cube blocks or similar samples.

- Manufactured from high quality steel, which is then hardened, smoothed and finished.
- The roughness value for the surface texture of the auxiliary platens is  $\leq 3.2 \mu\text{m}$ .
- $\varnothing 165 \text{ mm}$  and  $\varnothing 300 \text{ mm}$  Upper Platen (with ball seating assembly) and Lower Platen have centering rings on the lower platens for proper centering of 100 mm and 150 mm cube, 100 mm and 150 mm cylinder samples.



**HR-C1270**

## Block Platens with Sliding Rail Assembly

STANDARDS: EN 772-1, 12390-4

### Product Code: HR-C1250

Block Platens with Sliding Rail Assembly are installed on the compression testing machines for testing concrete blocks and other structural materials. The Sliding Rail Assembly allows the platens to be easily installed without removing the existing  $\varnothing 300 \text{ mm}$  compression platens. This assembly should be factory installed.

It should be noted that after installing, the vertical clearance between the platens decreases by 50 mm.

Block Platens Lifting Assembly is used for easy removal of the lower platen of Block Platens and easy replacement of the distance pieces between the piston and the lower platen.



**HR-C1250**

## Technical Specifications:

Product Code	HR-C1255	HR-C1260	HR-C1265	HR-C1270	HR-C1275
Product Name	Upper Loading Platen (with ball seating assembly) and Lower Loading Platen				
Standard	ASTM C39	ASTM C39	EN 12390-4 & ASTM C39	EN 12390-4	EN 772-1
Dimensions (mm)	$\varnothing 105$	$\varnothing 165$	$\varnothing 216$	$\varnothing 300$	310x510x50
Samples	$\varnothing 2", 3", 4"$ cylinders	$\varnothing 4", 6"$ cylinders, 100 mm cubes	$\varnothing 6"$ cylinders 100, 150 mm cubes	$\varnothing 100, 150, 160 \text{ mm}$ cylinders 100, 150, 200 mm cubes	Blocks up to 310x510 mm
Hardness (not less than)	$\geq 55 \text{ HRC}$	$\geq 55 \text{ HRC}$	$\geq 55 \text{ HRC}$	$\geq 55 \text{ HRC}$	$\geq 55 \text{ HRC}$



## Distance Pieces

Distance pieces are used to reduce the amount of vertical clearance between the upper platen and the lower platen.

**HR-C8201**  
**HR-C8202**  
**HR-C8203**

## Technical Specifications:

Product Name	Distance Piece					
Product Code	HR-C1500/TS	HR-C1550/TS	HR-C2000/TS	HR-C2100/TS	HR-C3000/TS	HR-C3100/TS
Distance Piece Dia. (mm)	$\varnothing 200$	$\varnothing 165$	$\varnothing 200$	$\varnothing 165$	$\varnothing 200$	$\varnothing 165$



# HİRA TESTING EQUIPMENT



### Loading Cylinder Assembly & Limit Switch

All frames have a single acting up stroking ram. The diameter of the piston is designed to work with the load capacity.

The maximum ram stroke is 50 mm, a limit switch is fitted to prevent over travel of the ram which cuts the power to the pump for safety.

At the end of the test process to start a new test the piston returns to default position.

The pressure transducer is used for load measurements.

There is a low friction coaxial PTFE seal between the cylinder and the piston fitted to the cylinder.

## HYDRAULIC POWER PACK AND H-TOUCH PRO MAX CONTROL UNIT

### Hydraulic Power Pack

Automatic Hydraulic Power Pack, dual stage, controlled by H-Touch Pro Max Control Unit is designed to supply the required oil to the load frames for loading.

Controller unit has a simple and compact configuration. The Hydraulic Power Pack, Control and Read out Units are positioned on the right-hand side of the load frame for easier accessibility, increased productivity and for safer operations.

Very silent power pack can load the specimen between 1 kN/sec. to 20 kN/sec, with an accuracy of  $\pm 5\%$ . A Rapid approach pump is supplied as standard. Safety valve (maximum pressure valve) is used to avoid machine overloading.

Maximum working pressure of the system is 400 bar.



HR-C8000/TS



### Dual Stage Pump

The dual stage pump is formed by two groups;

1. Low pressure gear pump
2. High pressure radial piston pump

On the dual stage pump, a high delivery, low pressure gear pump is used for rapid approach, while low delivery, high pressure radial piston pump is used for test execution. The rapid approach facility shortens the time interval from piston start until the upper platen touches to the specimen. This excellent feature helps to save a lot of time when a large number of specimens are going to be tested.

### Motor

The motor which drives the dual pumps in an AC motor and it is controlled by motor inverter.

The variation in the oil flow is executed with the variation of the rotation speed of the motor.





### **Distribution Block**

A distribution block is used to control the oil flow direction supplied by the dual stage pump, the following parts are fitted to the distribution block; Solenoid valve, Safety valve (max. pressure valve), Transducer, Low pressure gear pump and High pressure radial piston pump.

### **High Precision Pressure Transducer**

The HIRA range of Automatic Machines can be upgraded with option High Precision Pressure Transducer special calibration Class 1 starting from 1% of the full range.

This unique performance enables the machines to be used for a considerable number of applications including:

- Early age (2 or 3 days) compression strength tests
- Flexural and splitting tests by using proper accessories
- Mortar (Cement) compression tests by using proper accessories
- Core Testing



**HR-C8003**



### **Oil Tank**

The tank includes enough oil to fill the mechanism which pushes the ram during the test. The level and oil temperature can be seen on the indicator fitted to the tank. It has 25 L capacity. Hydraulic motor oil, number 46, must be used.

### **Digital Data Acquisition & Control System**

HIRATEST H-Touch Pro Max Control Unit is designed to control the automatic compressive, flexural and splitting tensile strength tests of construction materials such as concrete, cement mortar, masonry units, paving blocks, roofing tiles by processing of data from load-cells, pressure transducers or displacement transducers which are fitted to the machine.

All the operations of H-Touch Pro Max Control Unit are controlled from the front panel color resistive of TFT-LCD Touchscreen display and function keys.

The unit has easy to use menu options.

It displays all menu option listings simultaneously, allowing the operator to access the required option in a seamless manner to activate the option or enter a numeric value to set the test parameters.

H-Touch PRO Max Control Unit enable simultaneously display machine status, test values, warnings during operation and test graphs such as load-time or load-displacement curves in real time.

Digital graphic display of the unit is able to draw real-time "Load vs. Time" or "Stress vs. Time" graphics.



**HR-C8002/TS**

# HİRA TESTING EQUIPMENT

## Main Features of H-Touch Pro Max Control Unit

- 2 analog channels for load cell or pressure sensors or displacement sensors.
- Can control 2 frames
- Provides load control of two separate testing frames with Closed-loop PID.
- Optionally supplied-integrated thermal printer (If requested, must be specified in the order)
- Real-time numeric display of load, loading rate and load/ time curves with automatic resolution adjustment on the touchscreen
- Up to 8-point calibration support and adjustable digital gains for every channel
- User-customizable load, position limits and test termination conditions
- Backup and recall option for device settings
- Recalling to factory default settings option.
- Easy recall of embedded test parameters for different types of tests and sample sizes
- Storage capacity up to 10.000 test result or 80 hours real time data recording with 1 sample per second recording interval (recording interval is variable).
- Graph axes on touchscreen can be configured for different tests and configurations
- The axes of the graph drawn on the device can be set to constant maximum values or axes can be automatically scaled according to the data
- Three different unit system selection; kN- Mpa -mm or lbf- psi- in or kgf- kgf/cm<sup>2</sup>- cm
- Real time and adjustable date/time.
- Multi-language support (English, French, Spanish, Turkish, Russian...)
- LAN connection for instantaneous transfer of test data to PC.
- USB port support for transfer of test data to a flash drive.
- Password Protection for machine settings, calibration and channel menus
- Record of test results in txt and MS excel format on pre-defined intervals
- 5 different visual themes
- Customizable IP

## Hardware

- 2 fully customizable analog channels with 24-bit ADC and PGA-FPGA circuit
- 800x480 pixel and 65535 color resolution TFT-LCD touchscreen
- 33 Hz control loop
- 32 Bit, 120 MHz ARM CORTEX M3 micro-PROcessor (CPU) for data acquisition
- 32 Bit, 400 MHz ARM CORTEX M3 micro-PROcessor (CPU) for data display
- Additional memory support up to 32 GB via external USB flash drive
- Support for -optionally supplied- integrated thermal printer
- Real time display of test graph
- LAN connection for instantaneous transfer of test data to PC.
- USB port support for transfer of test data to a flash drive


## Software

HİRATEST H-GUI Software has been designed for data acquisition, processing controlling, presentation and reporting compressive, flexural and splitting tensile strength tests of construction materials such as concrete, cement mortar, masonry units, paving blocks, roofing tiles with appropriate Automatic Compression/Flexure Testing Machines and also with a computer.

The Automatic Compression Machine can be controlled (Start, Stop commands) by a computer with the HİRATEST H-GUI Software free of charge.

The advanced functions for database management provide an easy navigation of all saved data.


Test parameters can be set and details about the test carried out such as Test Type, Sample Type, Report details, Customer details, Sample details and other information required can be entered in the software.

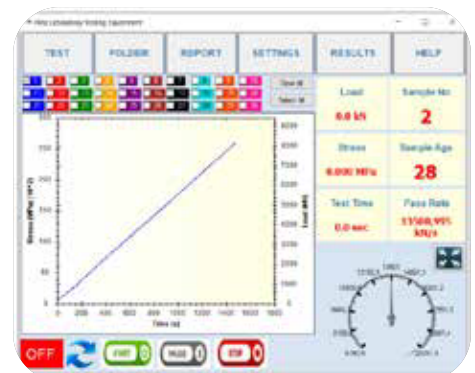

This informations and "Load vs. Time" or "Stress vs. Time" graphics can be seen and printed out on the Test Report.

### Following tests can be done with the HIRATEST H-GUI Software;

- Compressive Strength of Concrete Cylinders / Cubes
- Flexural Strength of Concrete Beams
- Compressive Strength of Cement Mortars
- Flexural Strength of Cement Mortars
- Tensile Splitting Strength of Concrete Paving Blocks
- Tensile Splitting Strength of Concrete Cylinders / Cubes
- Flexural Strength of Roofing Tiles
- Flexural Strength of Concrete Kerbs
- Compressive Strength of Masonry Units

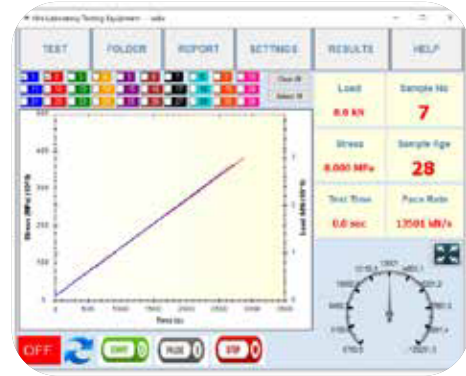

### Main Features of H-GUI Software

- Multi-language support and customizable user interface
- 30 Tests Results, Graphics and Properties Storage Capacity in One Test File
- Exporting test results to database
- Advanced test graphical interface
- Option to store and recall test information
- Modification of test machine parameters using the software
- Able to save frequently used texts in memory and recall them when necessary
- Exporting reports and graphs
- Flexible report and graph formats
- Help and user manual display

### Main Features of the device

- Pace rate control from 1 kN/sec to 20 kN/sec depending on piston size.
- Accuracy Class 1 acc. to EN 12390-4 starting from with the 5% of the machine capacity (Special calibration option Class 1 starting from 1% of the full range with HR-C8003)
- Supplied with factory calibration certificate for force transfer stability and the self-alignment of the upper loading platen conforming to EN 12390-4
- Tests automatically with closed loop control
- Tests can be performed by controlling the machine either H-Touch Screen Digital Readout Unit or on a computer with using free HIRATEST Software which is provided free of charge with the machines.
- Load measurement with a pressure transducer
- Hydraulic pump with dual stage for rapid approach
- Welded steel walled frame with a single acting piston
- Piston return at the end of test automatically
- Multi-Point calibration function for the channels
- Optionally supplied-integrated thermal printer (If requested, must be specified in the order)
- Ethernet port connecting for computer interface
- H-Touch Screen Digital Readout Unit
- Free of charge HIRATEST Software for the test control and printout the test report.

### Technical Specifications:

Product Name	Automatic Compression Testing Machines, Welded Wall					
Product Code	HR-C1500/TS	HR-C1550/TS	HR-C2000/TS	HR-C2100/TS	HR-C3000/TS	HR-C3100/TS
Standard	EN	ASTM	EN	ASTM	EN	ASTM
Capacity (kN)	1500	1500	2000	2000	3000	3000
Roughness (µm)	≤ 3.2	≤ 3.2	≤ 3.2	≤ 3.2	≤ 3.2	≤ 3.2
Ø Lower Platen (mm)	300	165	300	165	300	165
Ø Upper Platen (mm)	300	165	300	165	300	165
Max. Vertical clearance (mm)	340	365	340	365	340	365
Piston diameter (mm)	230	230	250	250	320	320
Piston Stroke(mm)	50	50	50	50	50	50
Horizontal clearance (mm)	320	320	350	350	440	440
Thickness of platens (mm)	50	50	50	50	50	50
Hardness of Platens (HRC)	55-60	55-60	55-60	55-60	55-60	55-60
Oil Capacity (lt)	25	25	25	25	25	25
Max. Working Pressure (bar)	400	400	400	400	400	400
Power (W)	750	750	750	750	750	750

**Safety Features**

- Maximum pressure valves to avoid machine overloading
- Piston travel limit switch
- Emergency stop button
- Software controlled maximum load value
- Front and rear transparent durable Plexiglas guards

**Technical Specifications:**

Product Code	Product Name	Dimensions (cm)	Weight (kg)	Power Supply
HR-C1500/TS	1500 kN Automatic Compression Testing Machine, Welded Wall, EN	79x38x93	650	220 V, 50-60 Hz, 1 ph
HR-C1550/TS	1500 kN Automatic Compression Testing Machine, Welded Wall, ASTM	79x38x93	600	220 V, 50-60 Hz, 1 ph
HR-C2000/TS	2000 kN Automatic Compression Testing Machine, Welded Wall, EN	81x38x101	850	220 V, 50-60 Hz, 1 ph
HR-C2100/TS	2000 kN Automatic Compression Testing Machine, Welded Wall, ASTM	81x38x101	800	220 V, 50-60 Hz, 1 ph
HR-C3000/TS	3000 kN Automatic Compression Testing Machine, Welded Wall, EN	95x48x105	1150	220 V, 50-60 Hz, 1 ph
HR-C3100/TS	3000 kN Automatic Compression Testing Machine, Welded Wall, ASTM	95x48x105	1100	220 V, 50-60 Hz, 1 ph

**Spare Parts & Accessories:**

Product Code	Product Name	Dimensions (cm)	Weight (kg)	Power Supply
HR-C1500/1	1500 kN Load Frame, Welded Wall, EN	43x35x93	550	---
HR-C1550/1	1500 kN Load Frame, Welded Wall, ASTM	43x35x93	500	---
HR-C2000/1	2000 kN Load Frame, Welded Wall, EN	45x35x101	750	---
HR-C2100/1	2000 kN Load Frame, Welded Wall, ASTM	45x35x101	700	---
HR-C3000/1	3000 kN Load Frame, Welded Wall, EN	59x48x105	1050	---
HR-C3100/1	3000 kN Load Frame, Welded Wall, ASTM	59x48x105	1000	---
HR-C8000/TS	Hydraulic Power Pack and H-Touch Pro Max Control Unit	36x38x91	100	220 V, 50-60 Hz, 1 ph
HR-C8001	Hydraulic Power Pack	36x38x91	98	220 V, 50-60 Hz, 1 ph
HR-C8002/TS	H-Touch Pro Max Control Unit	---	---	220 V, 50-60 Hz, 1 ph
HR-C8003	High Precision Pressure Transducer	---	---	---
HR-C8004/TS	H-GUI Software	---	---	---
HR-C8200	Distance Pieces	Ø 20 x 2,5	---	---
HR-C8201	Distance Pieces	Ø 20 x 3	---	---
HR-C8202	Distance Pieces	Ø 20 x 5	---	---
HR-C8203	Distance Pieces	Ø 20 x 8	---	---
HR-C8165	Distance Pieces	Ø 16,5 x 2,5	---	---
HR-C8166	Distance Pieces	Ø 16,5 x 3	---	---
HR-C8167	Distance Pieces	Ø 16,5 x 5	---	---
HR-C8168	Distance Pieces	Ø 16,5 x 8	---	---
HR-C1250	Block Platens with Sliding Rail Assembly	51x31x50	175	---
HR-C1280	Ball Seating Assembly	---	---	---
HR-G0975	Computer & Printer	---	---	220 V, 50-60 Hz, 1 ph
HR-G0975/1	Usb to com port Converter	---	---	---
HR-G0979	Thermal Printer	---	---	---
HR-G0979/1	Thermal Printer roll for printer (pack of 10 rolls)	---	---	---